



Costruzioni Elettroniche

di Marchioni Davide & Daniele s.n.c.

Via IV Novembre 215/5

Casella postale N° 33

40045 Ponte della Venturina (BO) ITALY

Tel +39 0534 60460

Fax +39 0534 60463


E-MAIL ufftec@rmitaly.com


http://www.rmitaly.com

Mod. ULA 50 UHF linear amplifier

Schematic diagram

Version 1.01

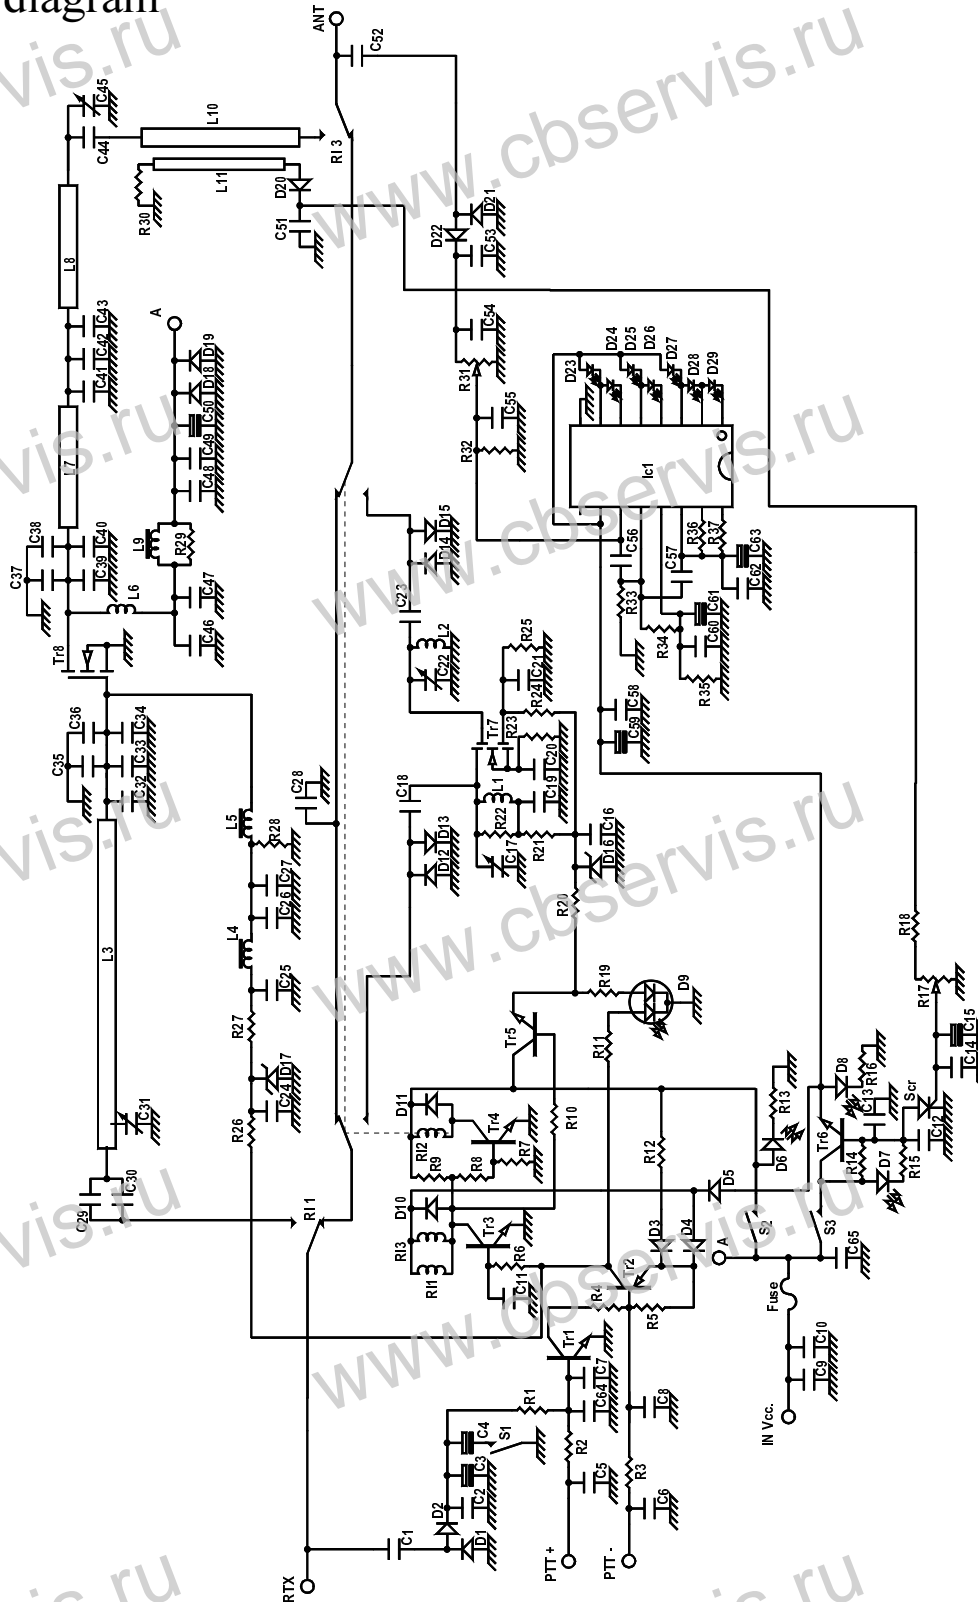

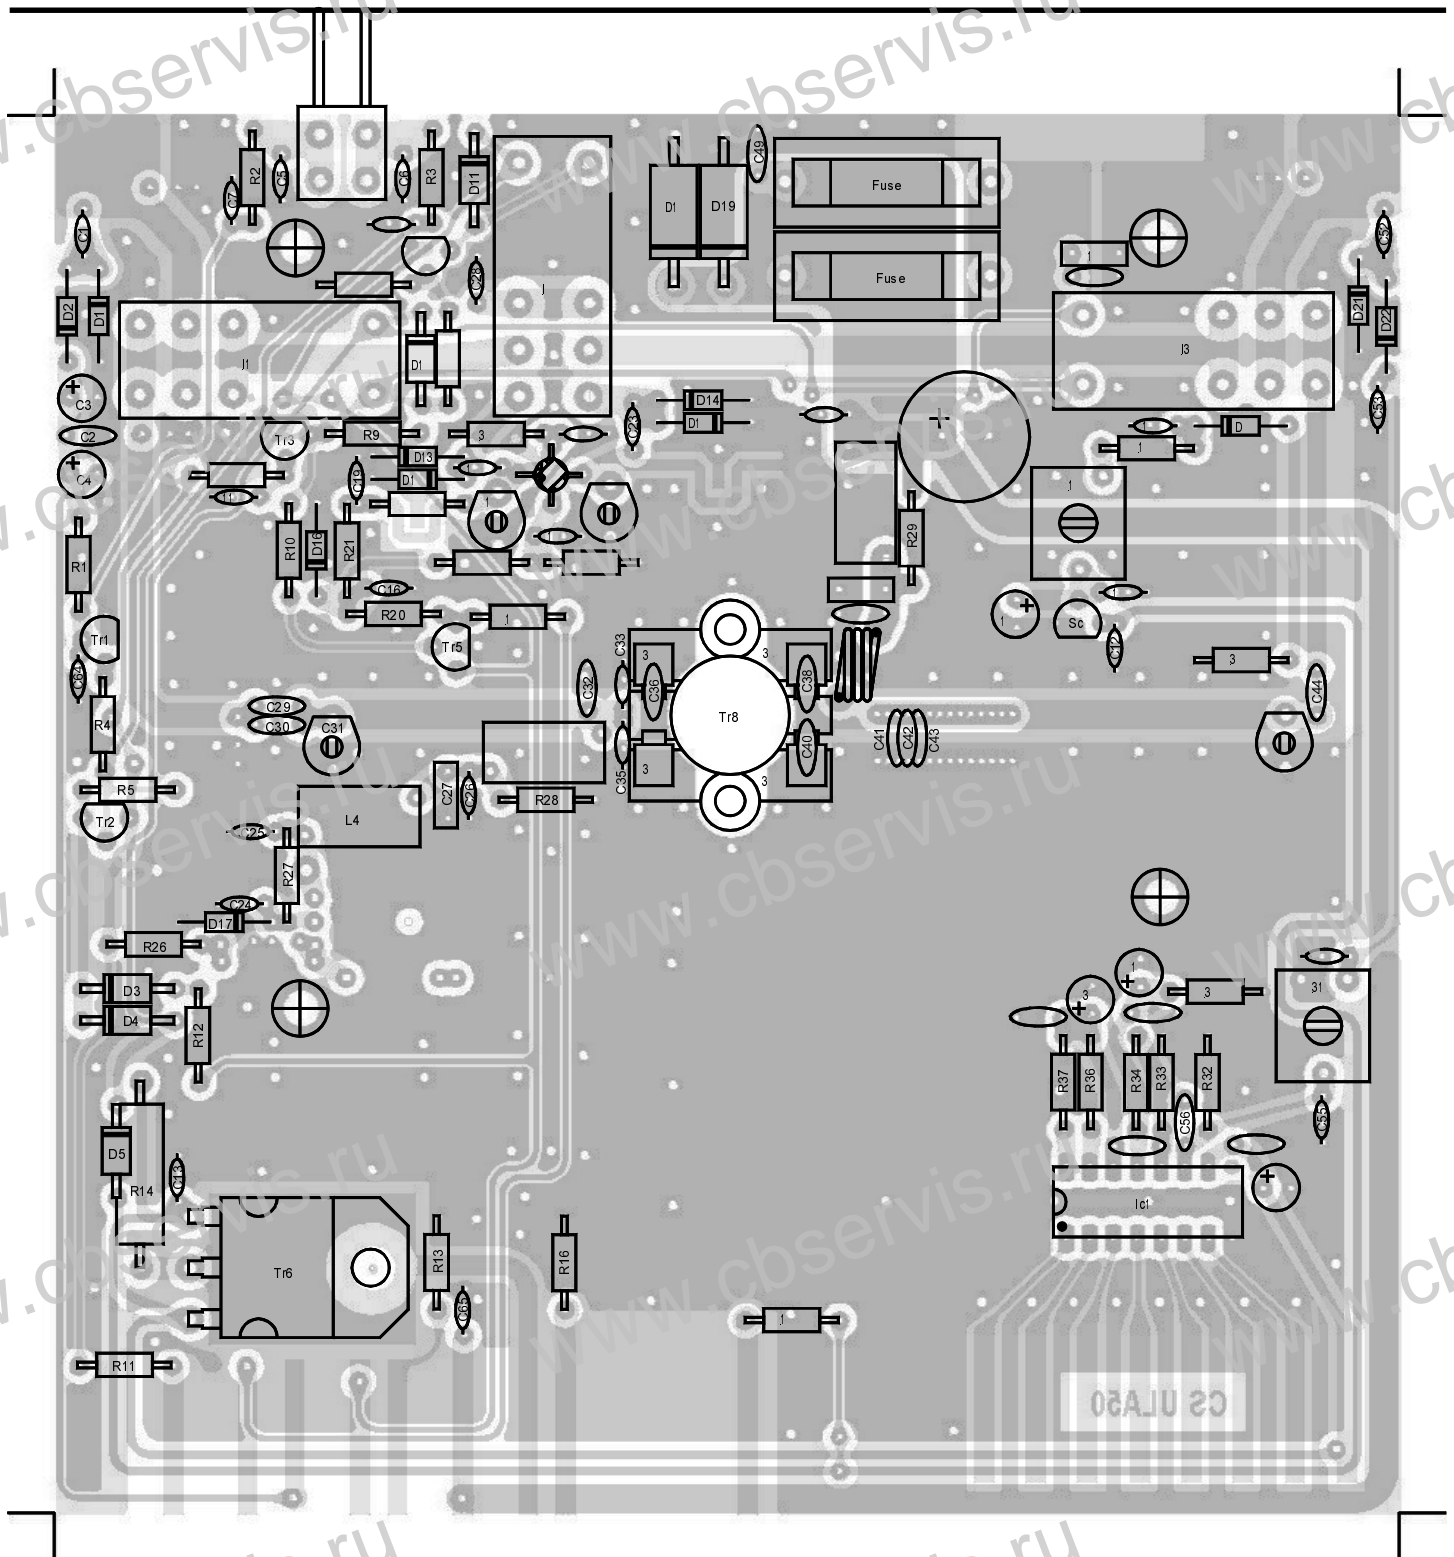

List of components

C ₁	=	1,8 pF	50 V	NP0	C ₉	=	100 nF	50 V	
C ₂	=	1,0 nF	50 V		C ₁₀	=	220 nF	63 V	Multilayer
C ₃	=	4,7 μF	25 V		C ₁₁	=	1,0 nF	50 V	
C ₄	=	33 μF	25 V		C ₁₂	=	1,0 nF	50 V	
C ₅	=	1,0 nF	50 V		C ₁₃	=	1,0 nF	50 V	
C ₆	=	1,0 nF	50 V		C ₁₄	=	1,0 nF	50 V	
C ₇	=	1,0 nF	50 V		C ₁₅	=	10 μF	25 V	
C ₈	=	1,0 nF	50 V		C ₁₆	=	1,0 nF	50 V	

C 17 =	Trimmer 2 - 5 pF	NP0	R 1 =	2,2 K Ω	¼ W
C 18 =	2,2 pF 50 V	NP0	R 2 =	2,2 K Ω	¼ W
C 19 =	1,0 nF 50 V		R 3 =	2,2 K Ω	¼ W
C 20 =	1,0 nF 50 V		R 4 =	2,2 K Ω	¼ W
C 21 =	1,0 nF 50 V		R 5 =	270 Ω	¼ W
C 22 =	Trimmer 3 - 10 pF	NP0	R 6 =	2,2 K Ω	¼ W
C 23 =	2,2 pF 50 V	NP0	R 7 =	22 K Ω	¼ W
C 24 =	1,0 nF 50 V		R 8 =	12 K Ω	¼ W
C 25 =	1,0 nF 50 V		R 9 =	4,7 K Ω	¼ W
C 26 =	1,0 nF 50 V		R 10 =	2,2 K Ω	¼ W
C 27 =	220 nF 63 V	Multilayer	R 11 =	1,0 K Ω	¼ W
C 28 =	1,8 pF 50 V	NP0	R 12 =	2,2 K Ω	¼ W
C 29 =	47 pF 50 V	NP0	R 13 =	1,0 K Ω	¼ W
C 30 =	47 pF 50 V	NP0	R 14 =	330 Ω	2 W
C 31 =	Trimmer 3 - 10 pF	NP0	R 15 =	1,0 K Ω	¼ W
C 32 =	33 + 12 pF 500 V	NP0	R 16 =	1,0 K Ω	¼ W
C 33 =	10 pF 50 V	NP0	R 17 =	Trimmer 4,7 K Ω	
C 34 =	2 x 33 pF 300 V	Mica	R 18 =	2,2 K Ω	¼ W
C 35 =	10 pF 50 V	NP0	R 19 =	1,0 K Ω	¼ W
C 36 =	12 pF 500 V	NP0	R 20 =	470 Ω	¼ W
C 37 =	33 pF 300 V	Mica	R 21 =	150 Ω	¼ W
C 38 =	8,2 pF 500 V	NP0	R 22 =	1,0 K Ω	¼ W
C 39 =	33 pF 300 V	Mica	R 23 =	10 Ω	¼ W
C 40 =	8,2 pF 500 V	NP0	R 24 =	6,8 K Ω	¼ W
C 41 =	3,9 pF 50 V	NP0	R 25 =	3,3 K Ω	¼ W
C 42 =	8,2 pF 500 V	NP0	R 26 =	1,0 K Ω	¼ W
C 43 =	3,3 pF 50 V	NP0	R 27 =	8,2 K Ω	¼ W
C 44 =	47 pF 500 V	NP0	R 28 =	4,7 K Ω	¼ W
C 45 =	Trimmer 3 - 10 pF	NP0	R 29 =	10 Ω	¼ W
C 46 =	220 nF 63 V	Multilayer	R 30 =	100 Ω	¼ W
C 47 =	100 pF 500 V	NP0	R 31 =	Trimmer 220 K Ω	
C 48 =	1,0 nF 50 V		R 32 =	4,7 K Ω	¼ W
C 49 =	1,0 nF 50 V		R 33 =	1,0 K Ω	¼ W
C 50 =	470 μ F 25 V		R 34 =	1,0 K Ω	¼ W
C 51 =	1,0 nF 50 V		R 35 =	1,0 K Ω	¼ W
C 52 =	2,2 pF 50 V	NP0	R 36 =	22 K Ω	¼ W
C 53 =	1,0 nF 50 V		R 37 =	10 K Ω	¼ W
C 54 =	1,0 nF 50 V		D 1 =	1N 4148	
C 55 =	1,0 nF 50 V		D 2 =	A118	
C 56 =	10 nF 50 V		D 3 =	1N 4004	
C 57 =	10 nF 50 V		D 4 =	1N 4004	
C 58 =	10 nF 50 V		D 5 =	1N 4004	
C 59 =	10 μ F 25 V		D 6 =	Yellow LED	
C 60 =	10 nF 50 V		D 7 =	Red LED	
C 61 =	4,7 μ F 25 V		D 8 =	Green LED	
C 62 =	10 nF 50 V		D 9 =	Dual color LED	
C 63 =	10 μ F 25 V		D 10 =	1N 4004	
C 64 =	1,0 nF 50 V		D 11 =	1N 4004	
C 65 =	1,0 nF 50 V		D 12 =	1N 4148	

D ₁₃	=	1N 4148
D ₁₄	=	1N 4148
D ₁₅	=	1N 4148
D ₁₆	=	Zener 5,1 V ½ W
D ₁₇	=	Zener 7,5 V ½ W
D ₁₈	=	1N5400
D ₁₉	=	1N5400
D ₂₀	=	1N 4148
D ₂₁	=	1N 4148
D ₂₂	=	1N 4148
D ₂₃	=	Green LED
D ₂₄	=	Green LED
D ₂₅	=	Green LED
D ₂₆	=	Green LED
D ₂₇	=	Green LED
D ₂₈	=	Green LED
D ₂₉	=	Green LED
Tr ₁	=	BC 547
Tr ₂	=	BC 327
Tr ₃	=	BC 547
Tr ₄	=	BC 547
Tr ₅	=	BC 337
Tr ₆	=	TIP 142
Tr ₇	=	BF 966 S
Tr ₈	=	MRF 5035
Scr	=	P 0102
Fuse	=	2 x 4 A
IC ₁	=	KA 2288
L ₁	=	Srtrip line
L ₂	=	Srtrip line
L ₃	=	Srtrip line
L ₄	=	VK 200
L ₅	=	VK 200
L ₆	=	2 turns wire ϕ 1,2 mm on ϕ 6 mm
L ₇	=	Srtrip line
L ₈	=	Srtrip line
L ₉	=	VK 200
L ₁₀	=	Srtrip line
L ₁₁	=	Srtrip line
RI ₁	=	4052 - 12
RI ₂	=	4052 - 12
RI ₃	=	4052 - 12
S ₁	=	Switch 3A (FM - SSB)
S ₂	=	Switch 3A (Pre ON - OFF)
S ₃	=	Switch 3A (Lin ON - OFF)